



# 5000 / 6000 CAPACITY

## Features:

33" wide frame for easy entry into a standard GMA 40x48 pallet.

Steel load wheels standard on 2" Lowered Height.

Polyurethane load wheels available at n/c.

Independent ductile iron bellcranks.

Solid 1 x 3" square push rods for strength.

One-piece cast ductile iron load wheel forks.

Steel entry wheel, for easy entry at lowered heights.

One-piece ductile iron pump housing, no welds to break or leak.


Internal self bleeding pump, easily rebuildable from seal kit.

All parts in stock, ready for same day shipment.



[www.PalletTruck.com](http://www.PalletTruck.com)  
1-800-350-0011

WESLEY INTERNATIONAL

# 4-WAY ENTRY

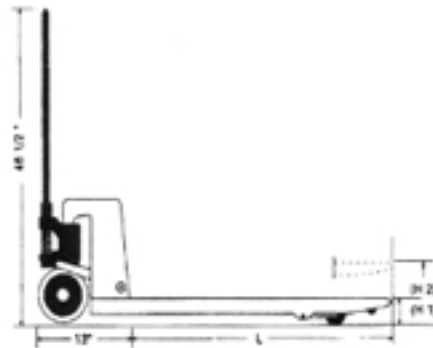

Standard Length (L)	Standard Length (A)
48	33
42	33
36	33

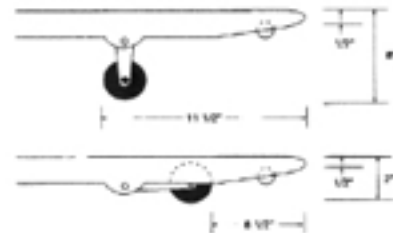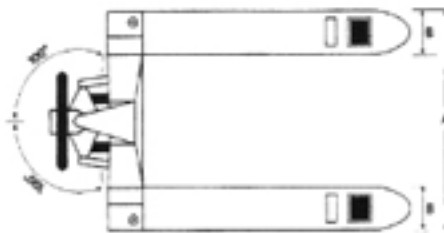

## Optional Equipment:

Load Back Rest (60" Tall)  
Load Stabilizer Bar  
Steel Steer Wheels  
Grease Fittings (15)

Skid Adapter - 3", 4", 5"  
Tandem Load Wheels  
Ramp, Ramp/Park Brake  
Custom Paint Colors